




## Auto Lens Meter L900

Accurate Enough to Tell Lens Grade

*Listen to the clinical*

## Wavefront Technology Ensures Reliable Measurement

By applying wavefront technology with Hartmann sensor, L900 has 145 measuring points which enable it to provide highly accurate measurement in fast speed. It uses green light LED which does not require ABBE compensation. In this case, the result will be more precise compared with traditional auto lens meter technology. Uniquely designed optical system enables L900 to measure much wider spherical range up to  $\pm 35.00D$ . This helps to measure the lens for high myopia patient and other lenses in complicated cases.

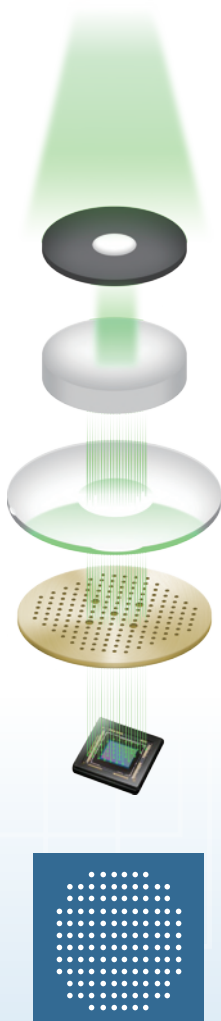




## Lens Grade Inspection

L900 can display the measuring result in 1° when the measuring step is set in 0.01D. This helps lens manufacturer, lens wholesaler and opticians to inspect lens quality and differentiate them from A grade to B grade, etc.

User can judge the lens grade by accurate cylinder power measurement.



☒ A Grade

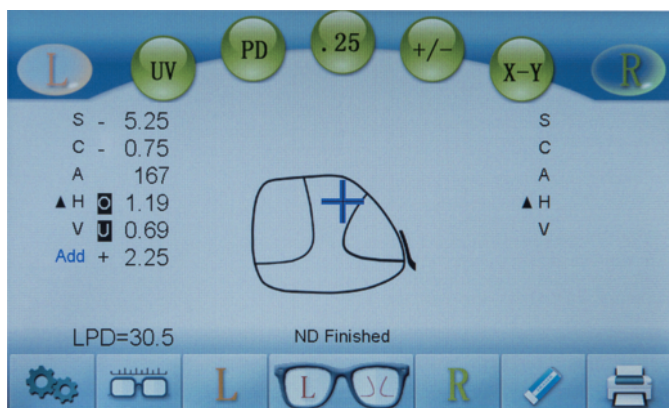

## Auto Lens Recognition

Be it a single vision lens, multifocal lens or progressive lens, L900 will recognize its type and enter into corresponding test mode quickly. This highly improves the workflow for optician to work more efficiently.



## Powerful Measurement for All Kinds of Lenses

Thanks to wavefront technology, L900 can measure all kinds of lenses such as scratched lens, deeply tinted lens and large curved lens, etc.

## Specially Developed Marking Pin

The specially developed marking pin is disposable without needing to add oil ink. The dots are marked evenly and cleanly onto the lens. L900 offers following options for the dots:

Color option: white (default), red



Dot diameter: 0.8mm/1.0mm(default)/1.2mm/1.5mm





## Edging Lens Selection Guide and PD Measure Function

L900 displays a graph for lens in different diameters to assist optician selecting suitable lens to fit the required frame. L900 also provides a scale mode for optician to easily measure the LPD, RPD and pupil height of the frame.

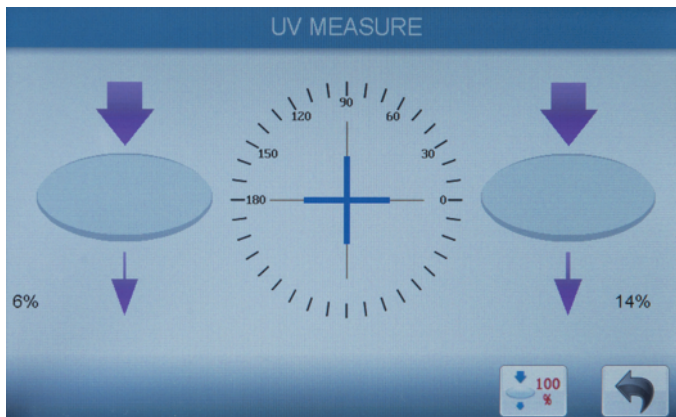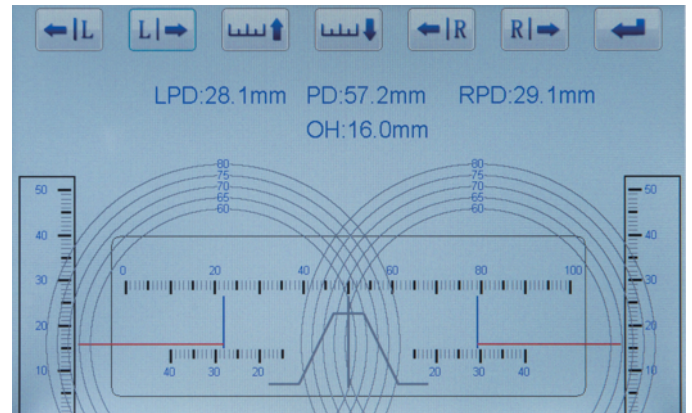


## UV Transmittance Measurement

UV transmittance of lenses can be detected and compared directly by L900. The result is displayed in percentage from 0% to 100%. Or UV can be displayed with other lens parameters in one interface to assist customers choosing the right lens for their needs.

## Contact Lens Measurement

L900 provides a special lens holder used to measure soft and hard contact lenses.

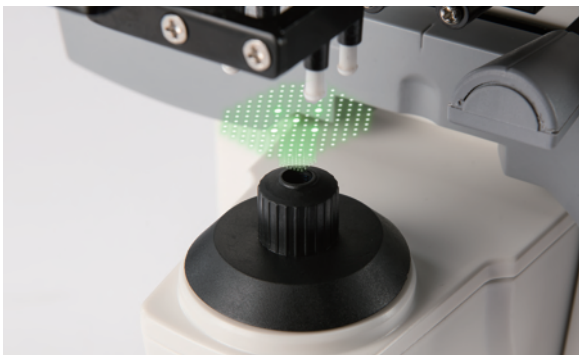

## Tiltable 7" Touch Color Screen

L900 is equipped with a tiltable 7" touch color screen. Users can tilt the screen to the comfortable angle for convenient reading.



## Specification

## L900

### MEASUREMENT MODE

Measurement Method	Hartmann-Shack wavefront sensor
Cylinder	+, +/-, -
Prism	Rectangular / Polar / Displacement
Measurable Lens Diameter	20mm ~ 100mm
Contact Lenses	Hard and Soft, 0 ~ $\pm 25D$ , BC: 6.00 ~ 9.00
PD Measurement	40mm ~ 85mm
UV Transmissivity	0 ~ 100%
Measurable Transmissivity	>10%; >20% at $\pm 10D$ and over
Measurable Lens	Single vision lens, Bifocal lens, Trifocal lens and Progressive lens, etc.

### MEASUREMENT RANGE

Sphere	0 ~ $\pm 35D$ (0.01D/0.06D/0.12D/0.25D step)
Cylinder	0 ~ $\pm 10D$ (0.01D/0.06D/0.12D/0.25D step)
Axis	0 ~ 180° (1° step)
ADD	0 ~ 10D (0.01D/0.06D/0.12D/0.25D step)
Prism	0 ~ 15 $\Delta$ (0.01 $\Delta$ /0.06 $\Delta$ /0.12 $\Delta$ /0.25 $\Delta$ step)

### OTHERS

Display	Tiltable 7" touch color TFT LCD (800x600)
Interface	RS-232 / USB 2.0 Port (for service)
Internal Printer	Thermal line printer
Input Voltage	AC 100~240V, 50/60Hz
Power Consumption	40VA
Dimension	565 x 350 x 355 (mm) (W/D/H)
Weight	6.8kgs



via Antiniana, 2i | 80078 Pozzuoli | NA (Italy)  
tel. +39 081 770 73 27 / +39 081 770 31 98 | fax +39 081 546 32 99  
info@medinovasrl.com / www.medinovasrl.com



## Shanghai VisuScience Meditech Co.,Ltd.

Add: No. 344 Sanlin Road, Pudong New Area, Shanghai, China  
Tel: +86-21- 34973659 | Fax: +86-21- 34973659  
E-mail: info@visuscience.com

Follow us on



www.visuscience.com